




unigy II

Tomorrow's energy systems...today

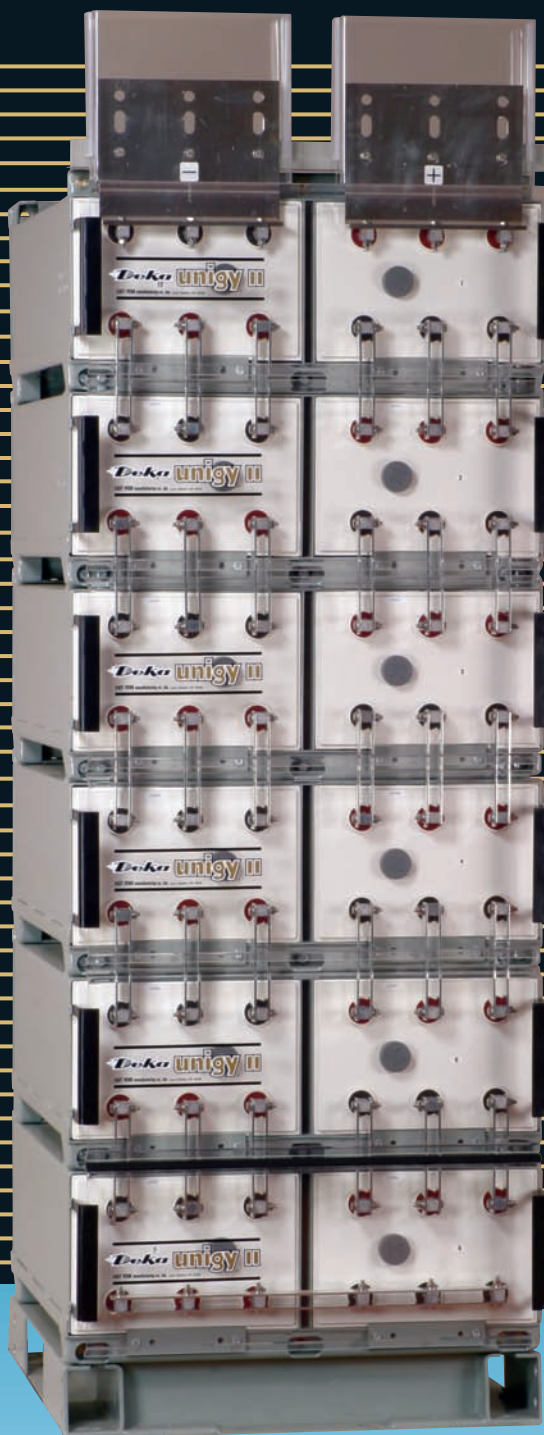

**EVEN
MORE
POWER**
in LESS SPACE

**NEW
2000 AH
DESIGN**

**PATENTED
SPACE SAVER™
INTERLOCK™
MODULE**

**LESS SPACE
& EVEN
GREATER
POWER THAN
PREVIOUS
DESIGN**

**ZONE 4
RATED***

**MICROCAT™
VENT**



QUALITY SYSTEM
CERTIFIED TO
ISO 9001
ISO/TS 16949
ISO 14001

Made in U.S.A.


AVR125-33 – 2000 AH									
AMPERES @ 77°F (25°)									
Final Voltage (V.P.C.)	3 HR	4 HR	5 HR	6 HR	8 HR	10 HR	12 HR	20 HR	24 HR
1.75	517	414	352	309	250	210	182	118	101
1.80	502	408	348	306	248	208	180	117	100
1.85	472	390	336	297	241	203	176	114	97.7
WATTS PER CELL @ 77° (25°)									
Final Voltage (V.P.C.)	10 MIN.	15 MIN.	20 MIN.	30 MIN.	40 MIN.	60 MIN.			
1.67	3948	3434	3138	2769	2606	2122			
1.75	3354	3144	2956	2640	2381	1996			
<i>Specific Gravity 1.300</i>					<i>Float Voltage: 2.25 +/- .01 per cell</i>				
AVR125LG-33 – 1800 AH									
AMPERES @ 77°F (25°)									
Final Voltage (V.P.C.)	3 HR	4 HR	5 HR	6 HR	8 HR	10 HR	12 HR	20 HR	24 HR
1.75	465	373	317	278	225	189	164	107	90.9
1.80	444	361	308	270	219	184	159	104	88.6
1.85	409	338	291	257	209	176	152	99.1	84.6
<i>Specific Gravity 1.250</i>					<i>Float Voltage: 2.21 +/- .01 per cell</i>				

No. Cells/Module	No. Plates/Cell	Part Numbers ¹	Module Volts	Amp Hour C/8 @ 1.75 vpc	Dimensions			
					Length ² (mm)	Depth ³ (mm)	Height ⁴ (mm)	Weight ⁵ (kgs.)
2	33	AVR125-33	4	2000	26.60" (676)	28.63" (727)	11.91" (303)	718 lbs. (326)
2	33	AVR125LG-33	4	1800	26.60" (676)	28.63" (727)	11.31" (303)	718 lbs. (326)

* Modules have been tested and certified to NEBS Zone 4, up to 3 modules high. (See East Penn for more information.)

- ¹ Flame retardant polypropylene jars and covers standard.
- ² For system length, take dimension and multiply by number of stack. For side termination, add an additional 6" (3" per side).
- ³ Includes front shield.
- ⁴ For module stack height, subtract 1.5" from height and multiply the number of modules and then add 1.5". For overall battery height (top termination) add 4" for base, 1.5" for termination bracket and 6.25" for top shield.
- ⁵ Weight includes module plus cells, but not cell hardware or base.

Please refer to the I&O Manual, systems operation, float voltages for proper charger setting.

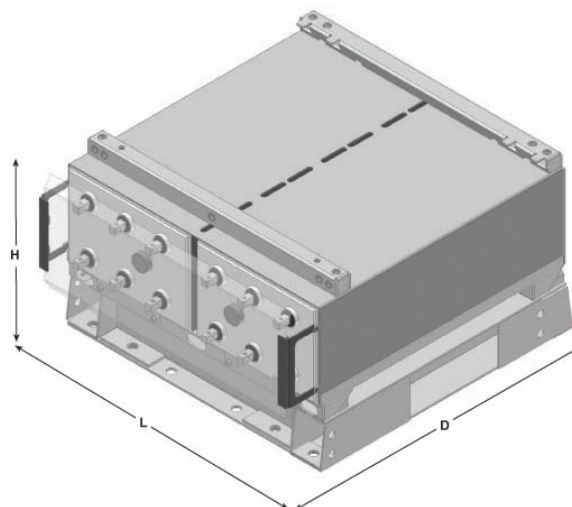

"POWERED FOR PERFORMANCE"®

EAST PENN manufacturing co., inc.

Lyon Station, PA 19536-0147 • Phone: 610-682-6361 • Fax: 610-682-4781

Order Department Hotline: 610-682-3263

www.eastpennunigy.com • e-mail: sales@eastpennunigy.com

E.P.M. Form No. 0983 Rev. 1/08 © 2008 by EPM Printed in U.S.A.

DISTRIBUTED BY:

All data subject to change without notice. No part of this document may be copied or reproduced, electronically or mechanically, without written permission from the company.