


UBC – Zone 4

12HX330

Essential - At or Below Grade

Battery Rack

5 TIER RACK SHOWN

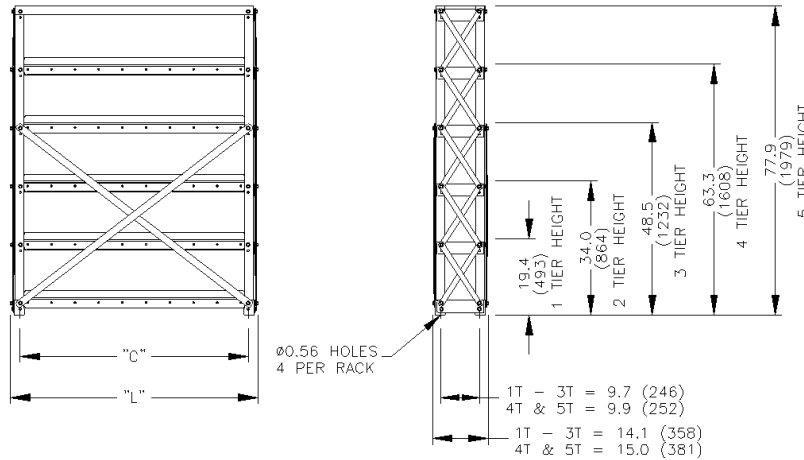

- AZMS UJC1 – 1 Tier
- UJC2 – 2 Tier
- UJC3 – 3 Tier
- UJC5 – 4 Tier
- UJC9 – 5 Tier

LENGTH Blocs per Row	ROWS per TIER	HEIGHT	CATALOG NO.	DIMENSIONS				UNPACKED WEIGHT		PACKED WEIGHT	
				L		C		lbs	kg	lbs	kg
				in	mm	in	mm				
4 BLOCS	1	1 TIER	U12HX3304J1TZ4A	29.9	759	25.3	643	51	23	101	46
	1	2 TIER	U12HX3304J2TZ4A					80	36	130	59
	1	3 TIER	U12HX3304J3TZ4A					119	54	169	77
	1	4 TIER	U12HX3304J4TZ4A					278	126	328	149
	1	5 TIER	U12HX3304J5TZ4A					345	157	395	179
5 BLOCS	1	1 TIER	U12HX3305J1TZ4A	36.8	935	32.2	818	57	26	107	49
	1	2 TIER	U12HX3305J2TZ4A					88	40	138	63
	1	3 TIER	U12HX3305J3TZ4A					131	59	181	82
	1	4 TIER	U12HX3305J4TZ4A					306	139	356	162
	1	5 TIER	U12HX3305J5TZ4A					381	173	431	196
6 BLOCS	1	1 TIER	U12HX3306J1TZ4A	43.7	1110	39.1	993	63	29	113	51
	1	2 TIER	U12HX3306J2TZ4A					97	44	147	67
	1	3 TIER	U12HX3306J3TZ4A					143	65	193	88
	1	4 TIER	U12HX3306J4TZ4A					335	152	385	175
	1	5 TIER	U12HX3306J5TZ4A					418	190	468	212
10 BLOCS	1	1 TIER	U12HX330101TZ4A	71.4	1814	66.8	1697	88	40	138	63
	1	2 TIER	U12HX330102TZ4A					130	59	180	82
	1	3 TIER	U12HX330103TZ4A					193	88	243	110
	1	4 TIER	U12HX330104TZ4A					454	206	504	229
	1	5 TIER	U12HX330105TZ4A					566	257	616	279

RACK SPECIFICATIONS:

- FRAMES:** Steel members covered with gray acid-resistant polyester powder coating
- HARDWARE:** Zinc-plated steel – RoHS compliant
- SEISMIC:** Designed using 0.495g lateral loading



RACK NOTES:

1. Racks are shipped unassembled. All necessary assembly hardware is included – see note 2.
2. Each frame must be anchored to the floor. Holes are provided at the base of each frame. Please refer to rack diagram for hole size and spacing. Determining the anchor bolt size and supplying the anchor bolts is the responsibility of the customer.
3. For rack installation instructions, please refer to EnerSys® Publication No. US-HXRACK-IM, *Instructions for Assembling DataSafe™ HX UBC Battery Racks*.
4. Each seismic rack should stand alone with a minimum clearance of 4.0 inches (102 mm) from any other object (walls, other racks, etc.).



EnerSys
 P.O. Box 14145
 Reading, PA 19612-4145
 USA
 Tel: +1-610-208-1991
 +1-800-538-3627
 Fax: +1-610-372-8613

EnerSys EMEA
 Brussels, Belgium
 Tel: +32 (0)2 247 94 47

EnerSys Asia
 Guangdong, China
 Tel: +86 755 2689 3639

Represented by: