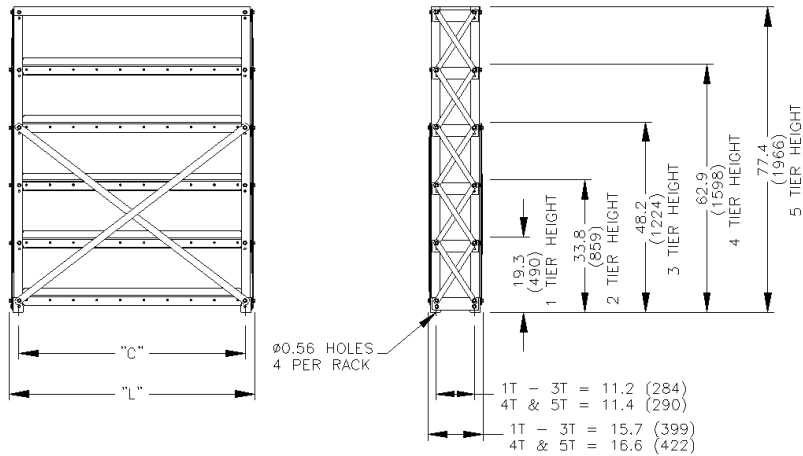


UBC – Zone 4**6HX800**

Essential - At or Below Grade

Battery Rack**5 TIER RACK SHOWN**

AZMS UJF1 – 1 Tier
UJF2 – 2 Tier
UJF3 – 3 Tier
UJF5 – 4 Tier
UJF9 – 5 Tier

LENGTH Blocs per Row	ROWS per TIER	HEIGHT	CATALOG NO.	DIMENSIONS				UNPACKED WEIGHT		PACKED WEIGHT	
				L		C		lbs	kg	lbs	kg
				in	mm	in	mm				
4 BLOCS	1	1 TIER	U6HX8004J1TZ4A	29.9	759	25.3	643	53	24	103	47
	1	2 TIER	U6HX8004J2TZ4A					81	37	131	59
	1	3 TIER	U6HX8004J3TZ4A					120	54	170	77
	1	4 TIER	U6HX8004J4TZ4A	30.7	780	282	128	332	151		
	1	5 TIER	U6HX8004J5TZ4A			351	159	401	182		
5 BLOCS	1	1 TIER	U6HX8005J1TZ4A	36.8	935	32.2	818	59	27	109	49
	1	2 TIER	U6HX8005J2TZ4A					89	40	139	63
	1	3 TIER	U6HX8005J3TZ4A					132	60	182	83
	1	4 TIER	U6HX8005J4TZ4A	37.7	958	310	141	360	163		
	1	5 TIER	U6HX8005J5TZ4A			386	175	436	198		
6 BLOCS	1	1 TIER	U6HX8006J1TZ4A	43.8	1113	39.2	996	65	30	115	52
	1	2 TIER	U6HX8006J2TZ4A					98	45	148	67
	1	3 TIER	U6HX8006J3TZ4A					145	66	195	89
	1	4 TIER	U6HX8006J4TZ4A	44.6	1133	339	154	389	177		
	1	5 TIER	U6HX8006J5TZ4A			422	191	472	214		
10 BLOCS	1	1 TIER	U6HX800101TZ4A	71.5	1816	67.0	1702	90	41	140	64
	1	2 TIER	U6HX800102TZ4A					131	59	181	82
	1	3 TIER	U6HX800103TZ4A					194	88	244	111
	1	4 TIER	U6HX800104TZ4A	72.4	1839	456	207	506	230		
	1	5 TIER	U6HX800105TZ4A			568	258	618	280		

RACK SPECIFICATIONS:

FRAMES: Steel members covered with gray acid-resistant polyester powder coating
HARDWARE: Zinc-plated steel – RoHS compliant
SEISMIC: Designed using 0.495g lateral loading

RACK NOTES:

- Racks are shipped unassembled. All necessary assembly hardware is included – see note 2.
- Each frame must be anchored to the floor. Holes are provided at the base of each frame. Please refer to rack diagram for hole size and spacing. Determining the anchor bolt size and supplying the anchor bolts is the responsibility of the customer.
- For rack installation instructions, please refer to EnerSys® Publication No. US-HXRACK-IM, *Instructions for Assembling DataSafe™ HX UBC Battery Racks*.
- Each seismic rack should stand alone with a minimum clearance of 4.0 inches (102 mm) from any other object (walls, other racks, etc.).



EnerSys
P.O. Box 14145
Reading, PA 19612-4145
USA
Tel: +1-610-208-1991
+1-800-538-3627
Fax: +1-610-372-8613

EnerSys EMEA
Brussels, Belgium
Tel: +32 (0)2 247 94 47

EnerSys Asia
Guangdong, China
Tel: +86 755 2689 3639

Represented by: